

# IN01-A

## Fingerprint Time Attendance & Access Control Terminal



### Introduction

IN01-A is a 3-inch TFT screen Attendance & Access Control Terminal. Adopting the new user-friendly firmware and latest core-board improves performance, accelerates identification speed and has more expansibility for various customization requirements. What's more, the user-friendly interface brings you a new experience. Built-in 2000mAh backup battery can eliminate the trouble of power failure. RS232/485, TCP/IP, USB-host and optional Wi-Fi, GPRS ensure a smooth data transmission between device and PC.

The IN01-A has access control interface for Wiegand-in, Wiegand-out, door lock, alarm and bell.



### Features

#### Remarkable User Experience

- \*Intuitive and stunning UI designed with the most popular and internationalized element.
- \*Interface operation adopts modularized hierarchical design. Simpler, better and more logical.
- \*Great user interactivity.

#### Enhanced Features and Performance

- \*Multi-languages.
- \*Data backup and retrieve.
- \*Advanced User ID consisted of letters and numbers.
- \*Chip encryption for firmware protection.
- \*Faster matching speed: Less than 0.5 second.
- \*Optional integrated Wi-Fi/GPRS.

#### Excellent Expandability

- \*Easy to extend functions and customize customers' requirements.



#### Access Control Interface

- \*For wiegand in and out, door lock connection, alarm and bell.


## Specifications

Fingerprint Capacity	3000
ID Card Capacity	10,000 (Optional)
Record Capacity	100,000
Display	3-inch TFT Screen
Communication	TCP/IP, RS232/485, USB (host and client)
Standard Functions	Work code, SMS, DST, Self-Service Query, Automatic Status Switch, Built-in Battery, Multiple Verify Mode
Optional Functions	ID/Mifare/HID, GPRS, Wi-Fi, Webserver, Photo ID, ADMS, Scheduled-bell, Anti-passback, External Bell, External Printer
Access Control Interface	3rd Party Electric Lock, Door Sensor, Exit Button, Alarm, and Door Bell
Wiegand Signal	Input & Output
Software	ZKTime.Net, ZKTime5.0
Power Supply	DC 12V 3A
Verification Speed	≤0.5 Sec.
Operating Temp.	0°C - 45°C
Operating Humidity	20%-80%
Dimension	211.5*159.4.2*47.8mm (Length*Width*Thickness)

## Dimensions



## Configuration

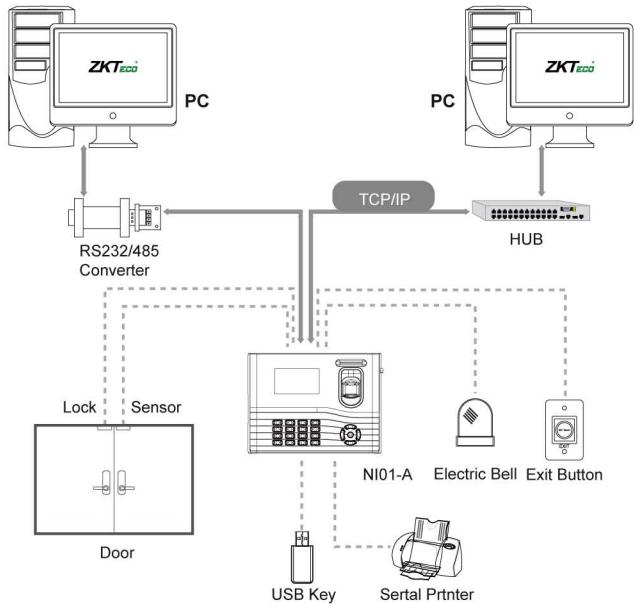

## Interface

