

BS-32E11K/BS-32E12K/BS-32E13K

2MP HD 4in1 Camera



DWDR



AWB



6KV
Protection



Day&Night




IP67

Features

- IR distance: 10-20m
- DNR, DWDR
- Lightning Protection up to 6KV
- AHD/TVI/CVI/CVBS video output
- IP67 ingress protection
- Video Linkage with Access Control System (BioSecurity 3.0)

Dimensions

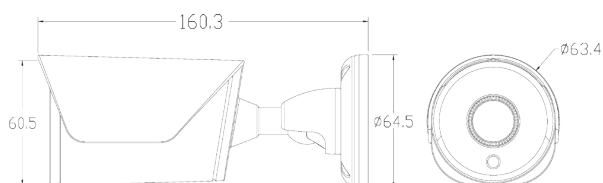

Specifications

Model	BS-32E11K		BS-32E12K	BS-32E13K
Camera				
Image Sensor	1/2.9" 2MP CMOS			
Efective Pixels	1920*1080			
Shutter Time	1/25s~1/50,000s (PAL);1/30s~1/60,000s (NTSC)			
Image System	PAL/NTSC			
Video Frame System	1080P@25fps (PAL);1080P@30fps (NTSC)			
IR Distance	10 ~ 20m			
Video Output	AHD/TVI/CVI/CVBS			
Lens	2.8mm	3.6mm	6mm	
Lens Mount	M12			
Horizontal FOV	114°	78°	51°	
S/N Ratio	≥41dB			
Functions				
OSD	UTC support based on DVR			
AGC	Support			
White Balance	Auto/Manual			
Day & Night	Auto/Manual			
Video Setting	Contrast/Sharpness/Color Gain/ Format/DWDR/DNR			
Language	Multi-Language			
General				
Casing	Aluminium alloy			
Ingress Protection	IP67			
Working Environment	-30℃ ~ 60℃ /Humidity 10%~90℃ RH			
Power Supply	DC12V±10% 1.5A			
Power Consumption	3.2W MAX (IR cut off)			
Dimensions	160.3 (L)*63.4 (W)*64.5 (H)mm			
Net Weight	300g			

