



# F7

Access Control  
Biometric Fingerprint Device



## Features

### Standard Features

- Slim & Elegant design
- Less than 1 second recognition
- Stores 2200 fingerprint templates
- Stores 50,000 transactions
- Anti-Passback function (with F12 slave)
- Built-in Wiegand Output
- TCP/IP Communication

### Enhanced Features

- Audio - Visual indications for valid / invalid entries
- Supports 50 time zones, 5 groups and 10 combinations
- Tamper switch
- Work Codes

### Software

- ZK Access Control Management 3.5
- ZKTime.net (T&A)

### Related Products



ZK4500



Exit Button



Maglocks



F12 Slave

### Alternative Products



F708




F707


## Specifications

- Fingerprint Capacity: 2,200 templates
- Transaction Capacity: 50,000 transactions
- Sensor: ZK Optical
- Communication: RS232/485, TCP/IP
- Access Control interfaces: 3rd party electric lock, door sensor, exit button, door alarm
- Access Control functions: Anti-pass back (with F12 slave)
- Power Supply: 12V DC 3A
- Operating Temperature: 0 °C - 45 °C
- Operating Humidity: 20% - 80%
- Dimension: 90 X 190 X 39mm

## Dimensions

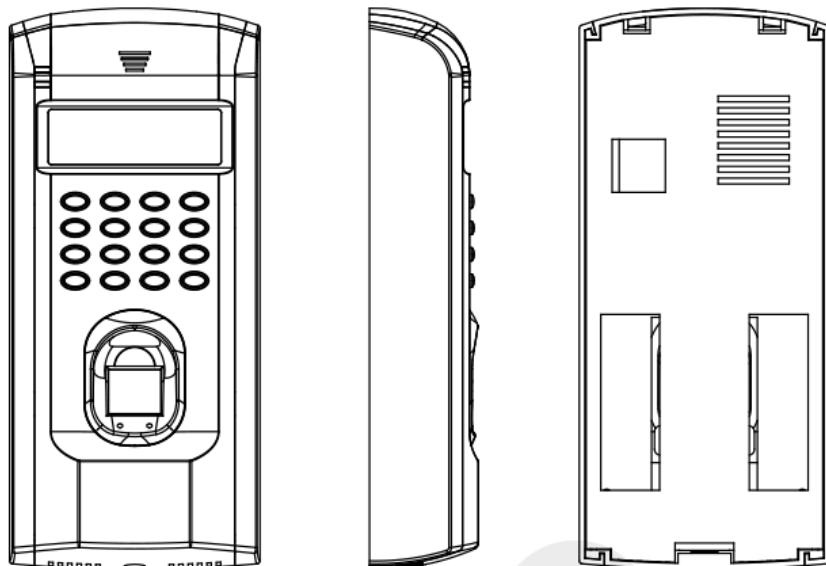

## Configuration

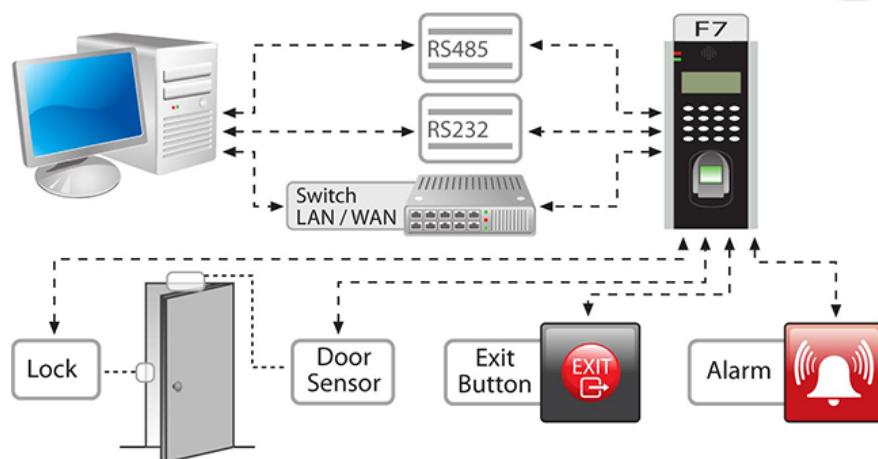

Power In	RS 232	RS 485	Wiegand Out	Door Sensor
GND	GND	GND	DATA0	SEN
+12V	RXD	485+	DATA1	GND
COM	TXD	485-	+5V Output	
NO	GND	GND		
NC				
GND				
AL+				
AL-				
BUT				
GND				
BELL+				
BELL-				

ZKTeco, ZKSoftware, ZKAccess, ZKVision, ZKBiolock, ZKAFIS are either registered trademarks or trademarks of ZKTECO INC and ZKTeco South Africa.

You must obtain written and signed permission from ZKTECO before using any photograph owned or licenced by ZKTECO.