

BL-32D28L/BL-32D38L

2MP HD 4 in 1 Camera



DWDR



AWB



6KV
Protection



Day&Night




IP67

Features

- IR distance: 20-30m
- 3D DNR, DWDR
- Lightning Protection up to 6KV
- AHD/TVI/CVI/CVBS video output
- IP67 ingress protection
- Video Linkage with Access Control System (BioSecurity 3.0)

Dimensions

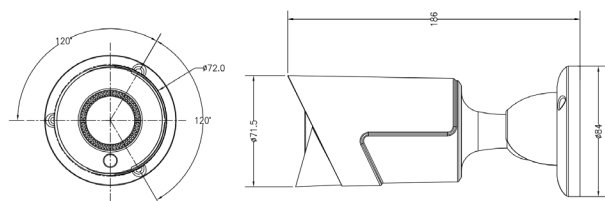

Specifications

Model	BL-32D28L	BL-32D38L
Camera		
Image Sensor	1/2.7" 2MP CMOS	
Efecitive Pixels	1920*1080	
Shutter Time	1/25s~1/50,000s (PAL); 1/30s~1/60,000s (NTSC)	
Image System	PAL/NTSC	
Video Frame System	1080P@25fps (PAL); 1080P@30fps (NTSC)	
IR Distance	20-30m	30-50m
Video Output	AHD/TVI/CVI/CVBS	
Lens	Motorized 2.8-12mm	
Lens Mount	Φ14	
Horizontal FOV	30°-99°	
S/N Ratio	≥41dB	
Functions		
OSD	UTC support based on DVR	
AGC	Support	
White Balance	Auto/Manual	
Day & Night	Auto/Manual	
Video Setting	Contrast/Sharpness/Color Gain/ Format/DWDR/DNR	
Language	Multi-Language	
General		
Casing	Aluminium alloy	
Ingress Protection	IP67	
Working Environment	-30℃ ~ 60℃ /Humidity 10%~90℃ RH	
Power Supply	DC12V±10% 1.5A	
Power Consumption	3.2W MAX (IR cut off)	
Dimension	186.5 (L)*71.7 (W)*84 (H)mm	
Net Weight	350g	

