

ProRF-T

RFID Access Control Terminal



ProRF-T is an RFID access control terminal incorporated with 2.4 inches TFT LCD Screen .The color display and new firmware structure offer a user-friendly menu for easy management, as well as photo taking capability that enables attendance photos and photo ID (optional). The new ZMM 220 hardware platform has a clock rate of 1.2 GHZ, greatly enhancing the speed verification. Touch keypad enables easy and convenient operations, such as managing users, accessing control parameter settings, or reading reports.

Features



Modern Design & Interactive UI



Simple Management & Scalability






Multiple Verification Modes:
Card / Password



Built In Camera
* Event Snapshot
* User Photo (Optional)



Touch Keypad

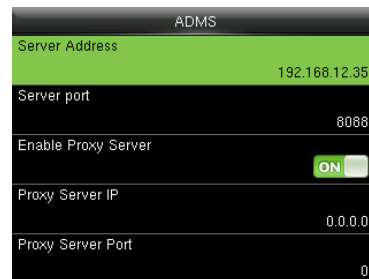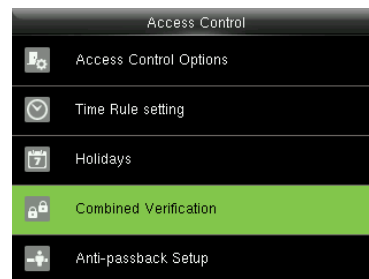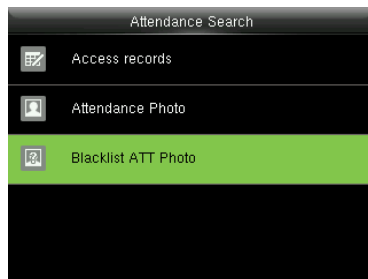

Specifications

Capacity

| | |
|--------------|---------|
| Cards | 50,000 |
| Transactions | 100,000 |
| User Photos | 3,000 |
| Event Photos | 7,000 |

Communication

TCP / IP
RS485 (For Slave Reader)
USB Host
Wiegand Input / Output
Security Relay Box

Access Control Interface

Lock Relay Output
Alarm Output / Auxiliary Input
Exit Button / Door Sensor
Doorbell Output

Hardware

1.2GHz CPU
Memory 128MB RAM / 256MB Flash
2.4 Inches TFT-LCD Screen
125KHz EM Reader / Mifare (Optional)
Hi-Fi Voice & Indicator
Tamper Switch Alarm
Touch Keypad
120° Wide Angle Camera

Standard Functions

Access Levels / Groups / Holidays
DST / Bell Schedule
Duress Mode (Password)
Anti-Passback
Record Query
Custom Wallpaper & Screen Saver

Special Functions

Multiple Verification Modes
Event Snapshot
User Photo (Optional)

Compatibility

Wiegand Slave Reader
RS485 Card Slave Reader (Optional)
ZKBioSecurity Software


Additional Info

Working Temperature: -10 °C ~ 50 °C
Dimensions: 195.5 × 87 × 35 mm.


Power

Operating Voltage 12V DC
Current Draw < 500mA

Configuration

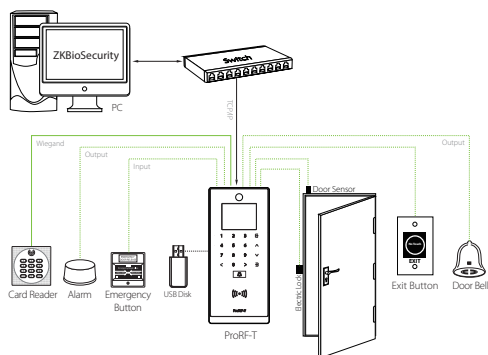

Dimensions (mm)



ZKTeco Inc.

www.zkteco.com

E-mail: sales@zkteco.com



© Copyright 2015, ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.