

FR1500

Flush-Mounted

RS-485 Fingerprint Slave Reader



Features

- Single gang Standard junction box installation.
- Flush-Mounted Design for neat installation.
- RS-485 Communication Interface.
- SilkID Fingerprint Sensor.
- Stainless Steel Front casing.
- Optional Fingerprint Protective Cover.

Specifications

Additional Info

Working Temperature: -10 °C ~ 45 °C
Working Humidity: 20 ~ 95%
Dimensions(LxWxH): 121.3 x 77.3 x 38 mm
Algorithm: ZKFinger v10.0

Power Supply

Operating Voltage 12V DC
Stand-by Mode Power Consumption: 12V*60mA=0.72W
Peak Current of Fingerprint scanning: 140mA

Hardware

1.0 GHz CPU
ZKSilkID Sensor
Buzzer Prompt
Three-color Indicator Light

Optional Features

125KHz RFID Card
125KHz HID Prox Card
13.56MHz MifareCard(S50 / S70)
13.56MHz HID Iclass Card


Compatibility

inBio/inBioPro Controllers
Standalone Fingerprint Devices


Communication

RS485

Configuration

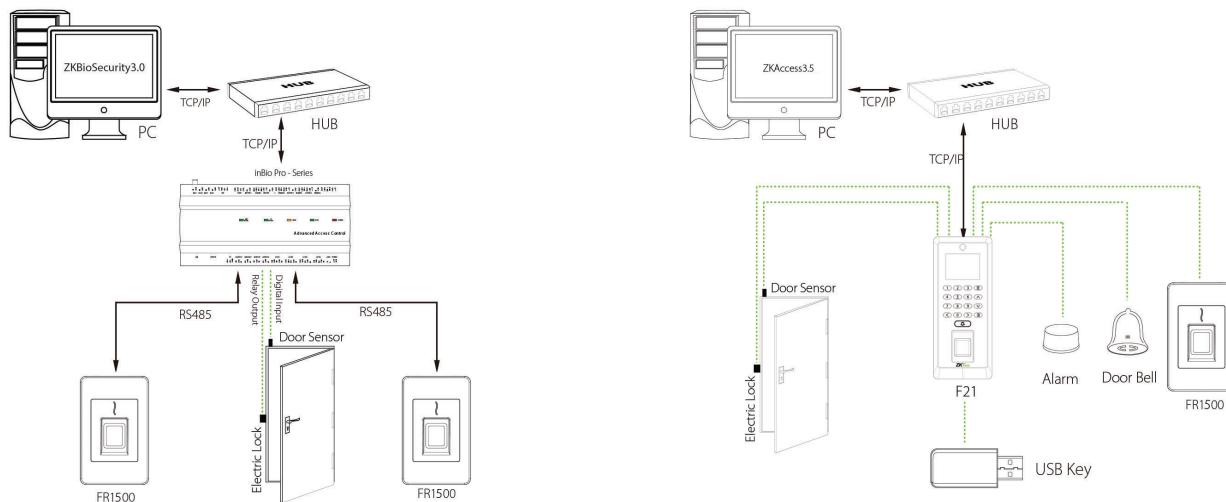

Dimensions (mm)

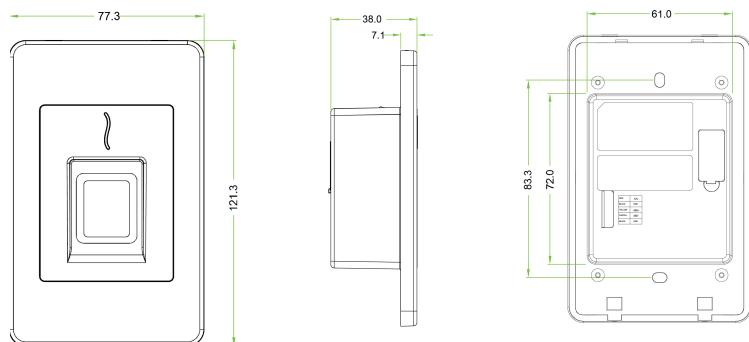

ZKTeco Inc.
www.zkteco.com
E-mail: sales@zkteco.com

© Copyright 2016. ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

