



iClock700

Fingerprint Time & Attendance and Access Control Terminal

iClock700 is a 3.5-inch TFT screen Time & Attendance and Access Control Terminal. With the new user-friendly firmware, iClock700 is equipped with features like stunning GUI, more stability, faster matching speed and better expandability.

iClock700 is compatible with various types of USB flash disks, ADMS and former SDK. Moreover, RS232/485, TCP/IP, and USB client ensures a smooth date transmission between device and PC. It also has Wi-Fi and 3G connectivity and access control connectivity with Wiegand out and in, electric lock, door sensor, exit button, alarm and door bell.

Features

Remarkable User Experience

- Intuitive and stunning UI designed with the most popular and internationalized element.
- Interface operation adopts modularized hierarchical design. Simpler, Better and More logical.
- Faster matching speed: Less than 1 second.

Enhanced Features and Performance

- Multi-languages.
- Data backup and retrieval.

- Advanced User ID consisting of letters and numbers.

- Chip encryption for firmware protection.

Excellent Expandability

- Easy to extend functions and customize customers' requirements.


Access Control Interface

- For Wiegand in and out, door lock connection, alarm and bell.


Specifications

| | |
|--------------------------|--|
| Fingerprint Capacity | 8000 |
| ID Card Capacity | 10,000 (Optional) |
| Record Capacity | 200,000 |
| Display | 3.5-inch TFT Screen |
| Communication | RS232/485, TCP/IP, USB-host/client |
| Standard Functions | Workcode, SMS, DST, Webserver, Scheduled-bell, Self-Service Query, Automatic Status Switch, Photo ID, T9 Input, Anti-passback, Camera, Built-in Battery, Multi Verification Mode, ADMS |
| Access Control Interface | 3rd Party Electric Lock, Door Sensor, Exit Button, Alarm, Door Bell |
| Wiegand Signal | Input & Output |
| Optional Functions | ID/Mifare/HID, External Printer, Wi-Fi, 3G |
| Software | BioTime |
| Power Supply | DC 12V 3A |
| Verification Speed | ≤1 Sec. |
| Operating Temp. | 0°C - 45°C |
| Operating Humidity | 20% - 80% |
| Dimension | 225.2×166.0×46.3mm (Length×Width×Thickness) |
| Gross Weight | 1.94 kg |

Configuration

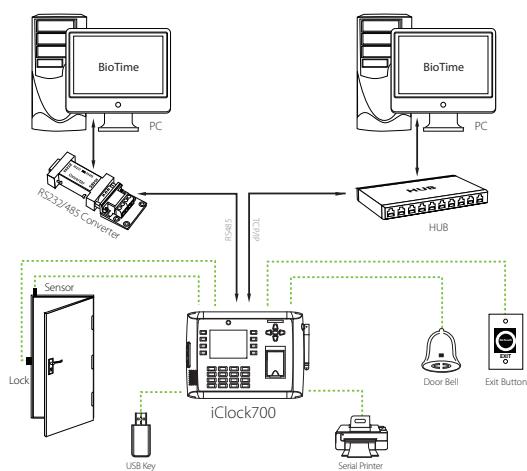

What's in the Box

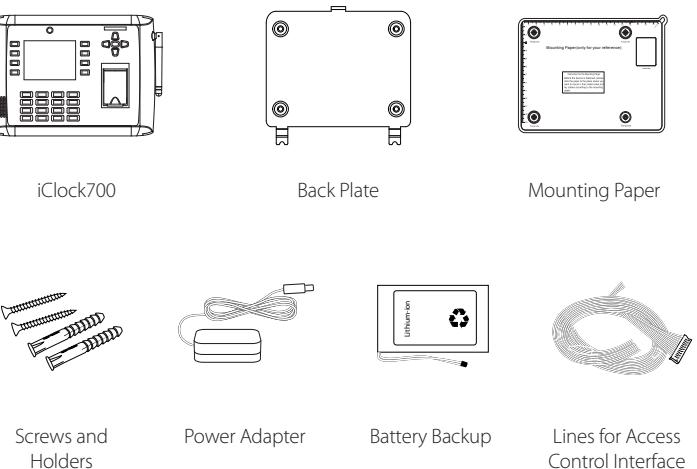

ZKTeco Middle East
E-mail: zk_me@zkteco.com
www.zkteco.me

© Copyright. ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

