

# ProID Series

## Physical Access Readers



ProID10



ProID40



ProID20



ProID30

The ProID family of card readers is designed to provide different options for customers. Which can support 125KHz EM, 13.56MHz MIFARE/DESFire/FeliCa/Legic.

ProID card reader adopts all-weather protection design with architectural crafting, grand appearance, and easy indoor & outdoor installation and application.

## Features


- With upgraded card reading solution comes higher stability of operation and energy efficiency.
- LED lights and Touch Keypad.
- Wiegand data port with 26-digit or 34-digit output for customization.
- Sealed design suitable for both indoor and outdoor use.
- Black or White color available

## Specifications

<b>Read Range</b> ProID10 EM/IC 3.5cm ProID20/30/40 EM/IC 5cm	<b>Output Format</b> Wiegand 26bit or 34bit Adjustable	<b>Operating Humidity</b> 10% ~ 90% Relative Humidity Non-Condensing
<b>Reading Time</b> ≤300ms	<b>Power</b> Operating Voltage 7 ~ 13VDC Current Draw < 80mA	<b>Audio</b> Beep
<b>Input Port</b> External LED Control External Buzzer Control	<b>LED</b> Pulsing White Standby Light Red and Green LEDs	<b>Index Protection</b> IP65
<b>Material</b> ABS+PC	<b>Operating Temperature</b> -20 °C ~ 65 °C	<b>Dimensions</b> ProID10: 80.5 × 44 × 15mm ProID20/30: 90 × 90 × 16mm ProID40: 116 × 75 × 15mm

## ProID series order instructions

### ProID10 WE-RS

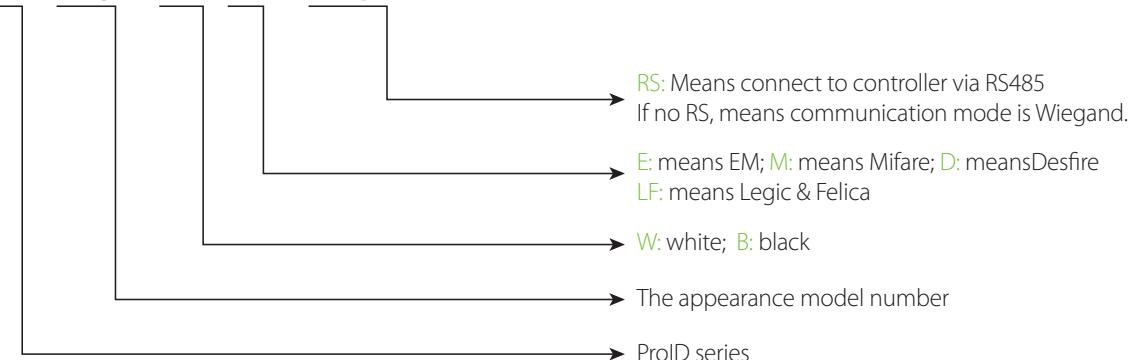

ZKTeco Inc.  
E-mail: sales@zkteco.com  
www.zkteco.com

© Copyright 2015. ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

