

DL-32D11B/ DL-32D12B/ DL-32D13B

2MP HD 4 in 1 Camera



DWDR



3D DNR



6KV
Protection



Day&Night



IP67




IK10

Features

- IR distance: 10-20m
- 3D DNR, DWDR
- Lightning Protection up to 6KV
- AHD/TVI/CVI/TVBS video output
- IP67 ingress protection
- IK10
- Video Linkage with Access ControlSystem(BioSecurity 3.0)

Dimensions

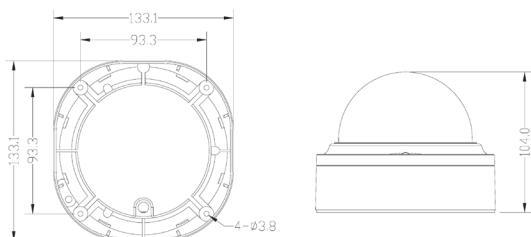

Specifications

Model	DL-32D11B	DL-32D12B	DL-32D13B
Camera			
Image Sensor	1/2.7" 2MP CMOS		
Efectitive Pixels	1920*1080		
Shutter Time	1/50s~1/50,000s (PAL);1/60s~1/50,000s (NTSC)		
Image System	PAL/NTSC		
Video Frame System	1080P@25fps (PAL);1080P@30fps(NTSC)		
IR Distance	10 ~ 20m		
Video Output	AHD/TVI/CVI/CVBS		
Lens	2.8mm	3.6mm	6mm
Lens Mount	M12		
Horizontal FOV	120°	85°	54°
S/N Ratio	≥41dB		
Functions			
OSD	UTC support based on DVR		
AGC	Support		
White Balance	Auto/Manual		
Day & Night	Auto/Manual		
Video Setting	Contrast/Sharpness/Color Gain/ Format/DWDR/DNR		
Language	Multi-Language		
General			
Casing	Aluminium alloy		
Ingress Protection	IP67		
Working Environment	-30℃ ~ 60℃ /Humidity 10%~90℃ RH		
Power Supply	DC12V±25% 1.5A		
Power Consumption	3.2W MAX (IR cut off)		
Dimensions	Φ133.1*104.0mm		
Net Weight	500g		

