

ES-34F11H/ES-34F12H/ES-34F13H

4MP HD 4 in 1 Camera



True WDR



3D DNR



6KV
Protection



Day&Night




IP67

Features

- IR distance:10-20m
- 3D DNR, True WDR
- Lightning Protection up to 6KV
- AHD/TVI/CVI/CVBS video output
- IP67 ingress protection
- Video Linkage with Access Control System (BioSecurity 3.0)

Dimensions

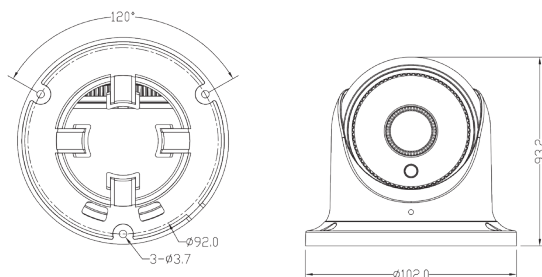

Specifications

Model	ES-34F11H		ES-34F12H	ES-34F13H
Camera				
Image Sensor	1/3" 4MP CMOS			
Efective Pixels	2560*1440			
Shutter Time	1/25s~1/50,000s (PAL);1/30s~1/60,000s (NTSC)			
Image System	PAL/NTSC			
Video Frame System	4MP@25fps (PAL); 4MP@30fps (NTSC)			
IR Distance	10 ~ 20m			
Video Output	AHD/ TVI/CVI/ CVBS			
Lens	2.8mm	3.6mm	6mm	
Lens Mount	M12			
Horizontal FOV	106°	75°	48°	
S/N Ratio	≥50dB			
Functions				
OSD	UTC support based on DVR			
AGC	Support			
White Balance	Auto/Manual			
Day & Night	Auto/Manual			
Video Setting	Contrast/Sharpness/Color Gain/Format/True WDR/DNR			
Language	Multi-Language			
General				
Casing	Aluminium alloy			
Ingress Protection	IP67			
Working Environment	-30℃ ~ 60℃ /Humidity 10%~90℃ RH			
Power Supply	DC12V±10% 1.5A			
Power Consumption	3.5W MAX (IR cut off)			
Dimensions	Φ102*93.2mm			
Net Weight	360g			

