ProRF-T
RFID Access Control Terminal

ProRF-T is an RFID access control terminal incorporated with 2.4 inches TFT LCD Screen .The color display and new firmware structure offer a user-friendly menu for easy management, as well as photo taking capability that enables attendance photos and photo ID (optional). The new ZMM 220 hardware platform has a clock rate of 1.2 GHZ, greatly enhancing the speed verification. Touch keypad enables easy and convenient operations, such as managing users, accessing control parameter settings, or reading reports.

Features

Modern Design & Interactive UI
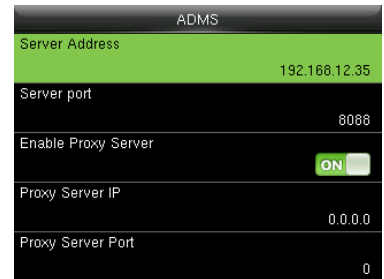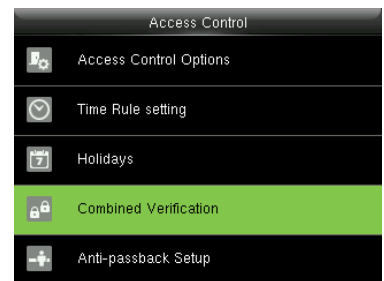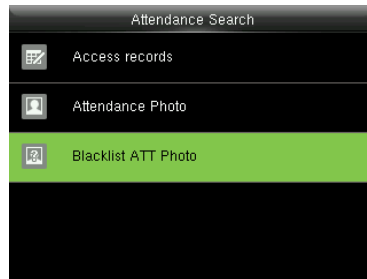

Simple Management & Scalability

Multiple Verification Modes:
Card / Password

Built In Camera
* Event Snapshot
* User Photo (Optional)

Touch Keypad

Specifications (*G*: GL Exclusive Feature)

Capacity
Cards	50,000
Transactions	100,000
User Photos	3,000
Event Photos	7,000

Communication
- *G* TCP / IP
- USB Host
- Wiegand Input / Output
- Security Relay Box

Access Control Interface
Lock Relay Output
Alarm Output / Auxiliary Input
Exit Button / Door Sensor
Doorbell Output

Hardware
- *G* 1.2GHz High Speed CPU
- *G* Memory 128MB RAM / 256MB Flash
- 2.4 Inches TFT-LCD Screen
- 125KHz EM Reader / Mifare (Optional)
- Hi-Fi Voice & Indicator
- Tamper Switch Alarm
- *G* Touch Keypad
- *G* 120° Wide Angle Camera

Standard Functions
Access Levels / Groups / Holidays
DST / Bell Schedule
Duress Mode (Password)
Anti-Passback
Record Query
Custom Wallpaper & Screen Saver

Special Functions
- *G* Multiple Verification Modes
- *G* Event Snapshot
- User Photo (Optional)
- ZK Encrypted Card

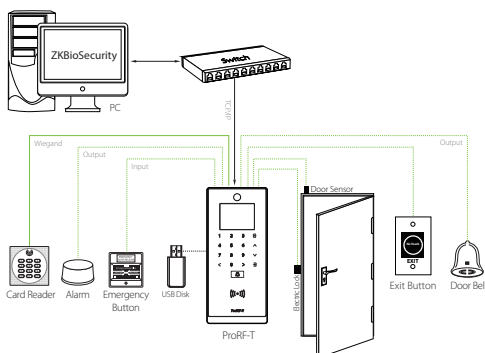## Compatibility
Wiegand Slave Reader
ZKBioSecurity Software

Additional Info
Working Temperature: -10 °C ~ 50 °C
Dimensions: 195.5 × 87 × 35 mm.
Package Includes 12V 3A Power Supply

Power
Operating Voltage 12V DC
Current Draw < 500mA

Configuration

Dimensions (mm)

ZKTeco Middle East
www.zkteco.me
E-mail: zk_me@zkteco.com