

# U 260-C

Time &  
Terminal

Attendance



The firmware of U260-C has been upgraded to the new firmware, it has new features like stunning GUI, more stability, faster matching speed and better expandability.

Users can easily manage data by networking U260-C via RS232/485, TCP/IP, and USB-host/client. Most importantly, all the functions can still operate in a networking state. It also supports data backup and retrieve to avoid the risk of accidental deletion.

## Feature

### Remarkable user experience

- Intuitive and stunning UI designed with the most popular and internationalized element.
- Interface operation adopts modularized hierarchical design.
- Simpler, better and more logical.
- Faster matching speed: Less than 0.5 second.
- Great user interactivity.

### Enhanced features and performance

- Multi-languages.
- Data backup and retrieve.
- Advanced User ID consisted of letters and numbers.
- Chip encryption for firmware protection.
- Compatibility with various types of USB flash disks, ADMS and former SDK.


### Excellent expandability

- Easy to extend functions and customize customers' requirements.


# Specifications

<b>Fingerprint Capacity</b>	3000
<b>ID Card Capacity</b>	10,000 (Optional)
<b>Record Capacity</b>	100,000
<b>Display</b>	3-inch Screen
<b>Communication</b>	RS232/485, TCP/IP, USB-host/client
<b>Standard Functions</b>	Work code, SMS, DST, Webserver, Scheduled-bell, ADMS Self-Service Query, Automatic Status Switch, T9 Input
<b>Optional Functions</b>	ID/Mifare/HID, External Printer and Bell, Photo ID, USB-client
<b>Software</b>	BioTime
<b>Power Supply</b>	DC 5V 2A
<b>Verification Speed</b>	≤0.5 Sec.
<b>Operating Temp.</b>	0 °C- 45 °C
<b>Operating Humidity</b>	20%-80%
<b>Dimension</b>	192.3 × 138.8 × 42.7mm (Length × Width × Thickness)
<b>Net Weight</b>	1.10 kg

## Configuration

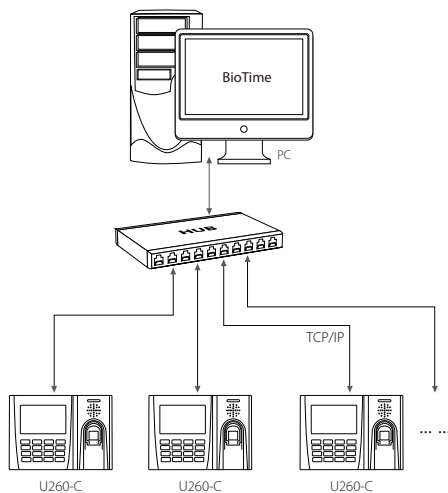

## What's in the Box

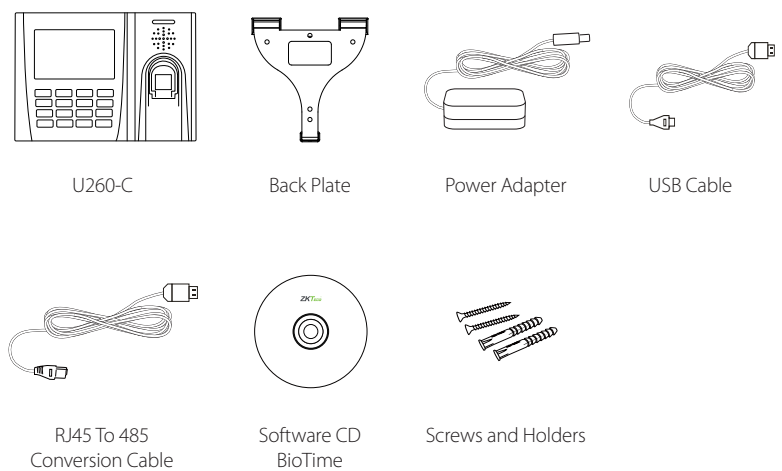

**ZKTeco Middle East**  
E-mail: [zk\\_me@zkteco.com](mailto:zk_me@zkteco.com)  
[www.zkteco.me](http://www.zkteco.me)