



iClock660

Fingerprint Time & Attendance Terminal

iClock660 is an innovative biometric fingerprint time & attendance terminal offering unparalleled performance using an advanced algorithm for reliability, precise, and excellent matching speed. The iClock660 features the fastest commercial-based fingerprint matching algorithm and ZK high performance, high image quality optical fingerprint sensor.

The 3.5" TFT can display more information vividly including user photo, fingerprint image quality, and verification result, etc. Eight function keys are the shortcuts to change the attendance status, work code or to browse the short message and can be defined as required. TCP/IP communication is standard and makes sure the data transmission between terminal and PC can be easily done within several seconds. The camera can capture the image of the user.


Features

- Color TFT screen with GUI interface for ease of use
- ZK Optical sensor
- 1 touch a-second user recognition
- Stores 8,000 templates and 200,000 transactions
- Reads fingerprint and/or PIN
- Optional integrated proximity or smart card reader
- Built-in serial and ethernet ports
- Built-in USB port allows for manual data transfer when network is not available
- Optional integrated Wi-Fi/GPRS available
- 8 user-defined function keys
- Multi-language support
- Built-in bell scheduling
- Real-time 1-touch data export 3rd party hosted and non-hosted applications
- Audio-visual indications for acceptance and rejection of valid/invalid fingers
- SDK available for OEM customers and software developers


Specifications

Fingerprint Capacity	8,000
Transaction Capacity	200,000
Display	3.5-inch TFT Screen
Communication	RS232/485, TCP/IP, USB-host
Standard Functions	Workcode, SMS, DLST, Scheduled-bell, Self-Service Query, Automatic Status Switch, T9 Input, photo-ID, 9 digit user ID
Optional Functions	ID/Mifare/HID/iClass, Webserver, 9-digit user, Wi-Fi, GPRS
Algorithm Version	ZKFinger v10.0
Camera	300,000 pixels camera
Power Supply	DC 12V 1.5A
Verification Speed	≤1 sec
Operating Temp.	0°C - 45°C
Operating Humidity	20% - 80%
Dimension	205.6×150×41.6 mm (Length×Width×Thickness)
Gross Weight	1.30 kg


Configuration

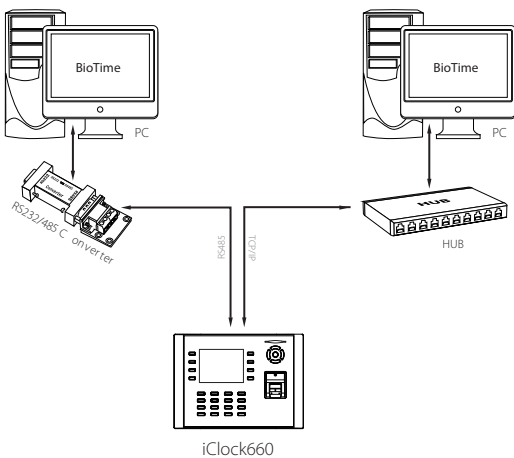


What's in the Box




iClock660



Back Plate



Power Adapter



Mounting Paper



Star-shape Screw Driver



ZKTeco Middle East
E-mail: zk_me@zkteco.com
www.zkteco.me

