


SC02-I565/75/86A

4K Smart Interactive Whiteboard

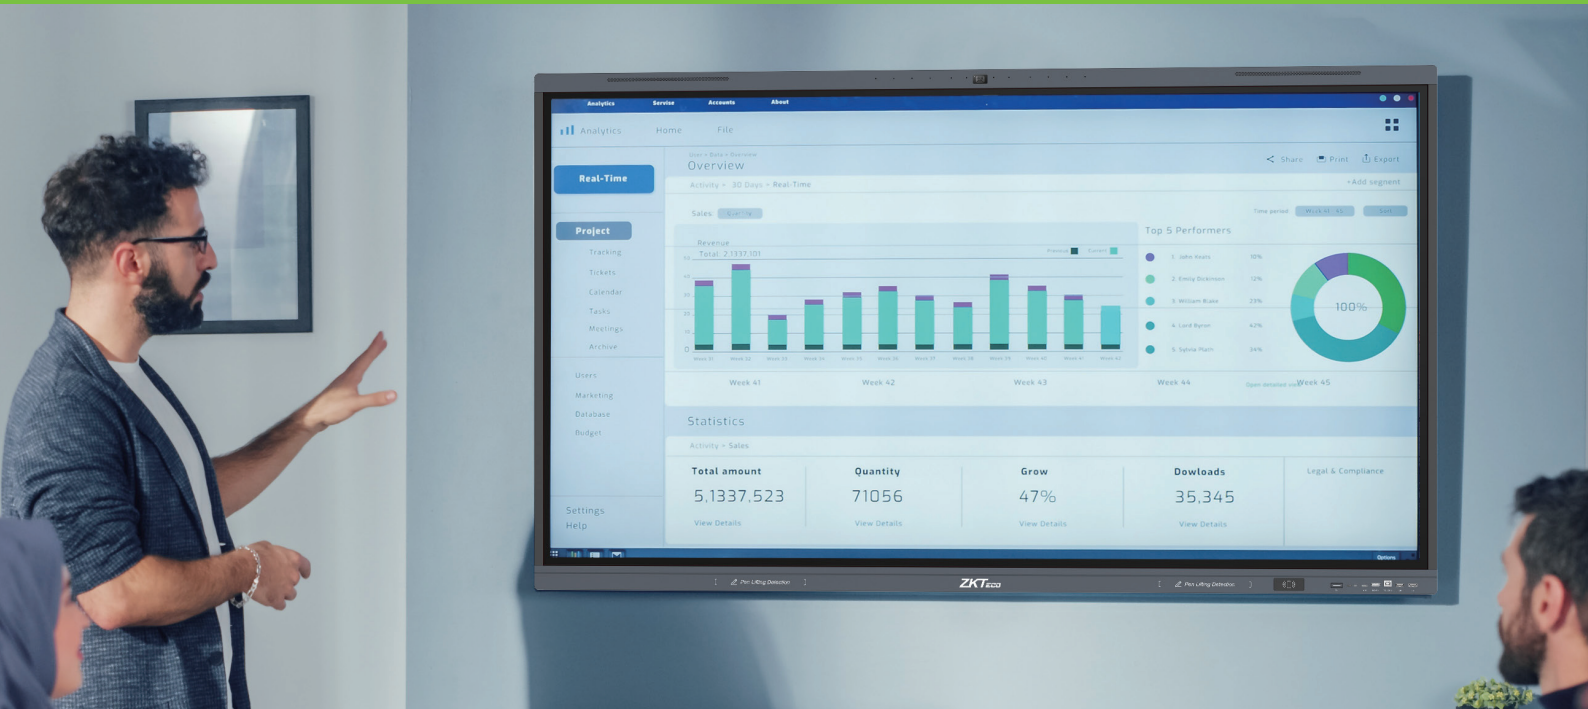


ZKTeco's 4K digital interactive whiteboard aims to promote the sharing of inspirational knowledge business and education. The integrated meeting solution of SC02-I565/75/86A product offer screen sharing, white-board writing and remote video conference, which strengthen collaboration.

Features




4K UHD Display



CPU: Quad core A76 + Quad core A55



Built-in 48-mega pixels Camera



Android 13.0 & Windows 11 (Optional)



8 Microphones Array



NFC Compatibility:
ISO/IEC 14443 Type A & Type B cards



Connect 9-Devices Display
Simultaneously

Specifications


Model		SC02-I565A	SC02-I575A	SC02-I586A
Screen				
Screen size		65-inch	75-inch	86-inch
Screen type		VA	ADS	IPS
Backlight		D-LED		
Backlight Life (typ.)		50,000 hours (min.) (typ.)		
Resolution		3840 × 2160 (pixels)		
Brightness		350cd/m ² (typ.)	400cd/m ² (typ.)	400cd/m ² (typ.)
Contrast Ratio		4000:1 (typ.)	5000:1 (typ.)	5000:1 (typ.)
Response Time		8ms (typ.)		
Frequency		60Hz		
Aspect Ratio		16:09		
Viewing angle		178°(H) / 178°(V)		
Display Colors		1.07B(8bit+FRC)		
Bonding Technology		The gap between tempered glass and screen is close to 0		
Touch				
Touch Technology		High Precision IR		
Touch Points		Up to 50		
Touch Response Time		≥2ms		
Touch Accuracy		Center 90% touch area: 1mm		
Anti-Glare		High transparent+Smooth+Anti-glare		
Glass Hardness		9H (Pencil Hardness) ; 7(Mohs Hardness) Tempered Glass		
Writing Height		≤ 1mm		
System				
CPU		Quad core A73+Quad core A53		
GPU		MaliG52 MP8		
Memory (RAM)		8GB (up to 16GB)		
Storage (ROM)		128GB (up to 256GB)		
Operating System		Android 13 (standard)/ Windows 11 (Optional)		
Connectivity				
Front Port		USB 3.0*2; Type-C(65W)*1; Touch*1; HDMI IN: 1		
Bottom Port		USB 2.0*1; DP IN*1; Touch*1; RS232*1; LAN*2; SPDIF*1		
Side Port		AUDIO IN*1; AUDIO OUT*1; Type-C OUT*1; USB 3.0*2; Touch * 1; HDMI IN: 3; HDMI OUT*1; Type-C(65W)*1; OPS slot (for slot-in PC)*1		
Built-in peripherals				
WiFi+Bluetooth		WiFi 6: 802.11 ax/b/g/n/ac		
		BT 5.2: 2.1+EDR/4.2/5.2		
NFC		ISO / IEC 14443 Type A & Type B cards		
Camera	Pixel	48 MP		
	POV	FOV Diagonal 106°		
	Face tracking	Support		
	Sound localization	Support		

Microphone	Array quantity	8 microphones array(up to 12m)		
	Pickup Range	Support		
	3D noise reduction	Support		
	AEC & AGC	Support		
Speaker		2x8W + 2x18W		
Power				
Operating Power		100 V ~ 240 V/AC, 50/60 Hz		
Standby Power Consumption		<0.5W		
Power Consumption(typ.) (100% Brightness)		200W	300W	550W
Physical				
Dimensions (W × H × D)		1488x86x915mm	1709x86x1039mm	1957 x98.5 x1179mm
Package Dimensions (L × W × H)		1628x208x1014mm	1863x225x1163mm	2110x225x1304mm
Net Weight (kg)		40kg	52.5kg	64kg
Weight with Packaging (kg)		52kg	64kg	84kg
Case Material		Aluminium Alloy and Sheet Metal		
Color		Blue Grey		
Environment				
Operating Temperature		0°C to 40°C		
Storage Temperature		10°C to 60°C		
Operating Humidity		20% to 80% RH (Non-condensing)		
Storage Humidity		10% to 60% RH (Non-condensing)		
Accessories				
Cables		Power Cable*1, USB Cable*1, HDMI Cable*1		
Remote Controller		1		
Wall Mount		1		
Stylus Pen		2		
Eraser		1		
Peripheral Accessories (Optional)				
Movable bracket		YES		
OPS		YES		
Wireless Dongle		YES		

Applications



Training room

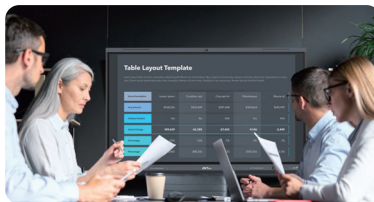

Meeting room



Show room

