



BioPro SA20

Fingerprint Time Attendance and Access Control Terminal

BioPro SA20 is a time attendance and access control terminal with advanced BiOD technology. It possesses outstandingly high identification rate towards dry, wet and rough finger. Anti-highlight and side-beams minimize the interference occurred during fingerprint verification and infrared technology enables the device to function automatically when fingerprints are detected, reducing unnecessary electrical usage thus saving energy.

In addition, with the brand new ZMM220 hardware platform, its clock rate can attain 1.2GHZ. Such speedy hardware platform and fingerprint algorithm greatly enhance the speed of fingerprint verification.

Features

- 2.4-inch TFT color screen
- BiOD fingerprint reader with Anti-Interference Technology and Sensor-Activation function.
- Multiple Verification Modes: Multi-verification methods (card is optional) providing user various choices
- Full Access Control Features: Anti-passback, access control interface for electric lock, door sensor, exit button, alarm and doorbell
- Built-in auxiliary input with enhanced flexibility to link with wired detector or emergency switch

Specifications

Display	2.4-inch TFT LCD Color Screen
Fingerprint Capacity	3,000
Card Capacity	5,000 (Optional)
Transaction Capacity	100,000
Sensor	BioID Sensor
Algorithm Version	ZKFinger VX10.0
Communication	RS232/485, TCP/IP, USB-host
Access Control Interface	Electric Lock, Door Sensor, Exit Button, Alarm, Doorbell
Wiegand Signal	Input, Output, SRB
Aux. Input	1ea for linkage function
Standard Functions	DST, Automatic Status Switch, Anti-passback, Scheduled-Bell, T9 input, ADMS
Optional Functions	ID/Mifare, RS485 (for slave reader), Printer
Power Supply	12V DC, 3A
Operating Temperature	0 °C- 45 °C
Operating Humidity	20%-80%
SDK and software	Standalone SDK, ZKAccess3.5 software

Optional Accessories



RFID Reader



Exit Button



Electric Lock




Alarm



Sensor

Configuration

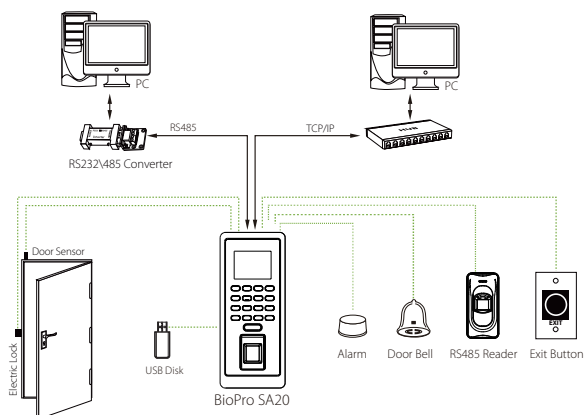

Dimensions (mm)

