


# RS485 Reader Series



KR100M-RS



KR502E/M-RS



KR503E/M-RS

## Specifications

### Read Range

KRxxx-E: Up to 10CM

KRxxx-M: Up to 5CM

### Reading Time

≤200ms

### Input Port

External LED Control

External Buzzer Control

### Operating Temperature

-20°C to 65°C(-10° to +70°C)

### Supported Panel

C3-200, C3-400, InBio160,

InBio460

### Power/Current

DC 6-14V / Max.70mA

### Operating Humidity

10% to 90% relative humidity

non-condensing

### Material

ABS+PC with texture

### Beeper

Yes

### LED

Red and Green LEDs

### Index of Protection

KR100M-RS:IP65

KR502E/M-RS:IP64


KR503E/M-RS:IP65

### Output Format

RS485

## Dimensions

	KR100M-RS	KR502E/M-RS	KR503E/M-RS
Height	11.6cm	8.6cm	11.6cm
Depth	1.7cm	2.6cm	1.6cm
Width	7.5cm	4.4cm	7.5cm
Weight	120g	150g	120g

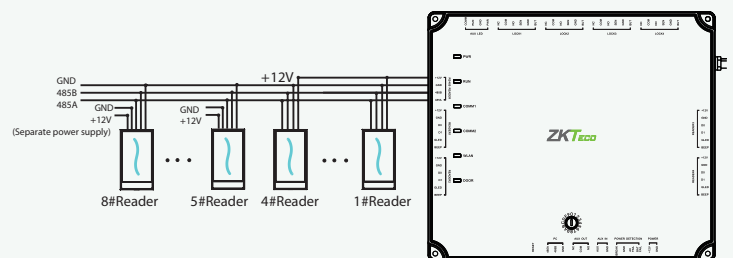

ZKTECO CO.,LTD.  
E-mail: sales@zkteco.com  
www.zkteco.com

© Copyright 2017. ZKTECO CO.,LTD. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

