



iClock360

Fingerprint Time & Attendance Terminal

The firmware of iClock360 has been updated to the New version with whole new experiences including stunning GUI, rock-solid stability, fast matching and expandability.

Users can easily manage data by networking iClock360 via TCP/IP, and USB host / client(optional). Most importantly, all the functions can still operate in a

networking state. iClock360 is compatible with various types of USB flash disks, ADMS and former SDK. It also supports data backup and retrieve to avoid the risk of accidental deletion.

It promotes the fingerprint time & attendance management to the next level. You can get the best of benefits from the iClock360.

Features

Remarkable User Experience

- Intuitive and stunning UI designed with the most popular and internationalized factor.
- Interface operation adopts modularized hierarchical design. Simpler, better and more logical.
- Faster matching speed: less than 1 second.

Enhanced Features and Performance

- User validity settings.
- Data backup and retrieve.
- Advanced User ID consisting of letters and numbers.
- Chip encryption for firmware protection.
- More flexible menu configuration: double line text display.

Excellent Expandability


- Easy to extend functions and customize customers demand.

Specifications


Fingerprint Capacity	8,000
Card Capacity	10,000 (Optional)
Record Capacity	200,000
Display	3.5-inch Screen
Communication	TCP/IP, RS232* (optional) , USB Host, USB Client (optional)
Standard Functions	Workcode, SMS, DST, Scheduled-bell, Self-Service Query, Automatic Status Switch, T9 input, 14 digit user ID, and photo-ID
Optional Functions	ID / IC / HID, Webserver, and Wi-Fi, ADMS, External Bell and Printer
Software	ZKBio Time.Net / ZKBio Time
Power Supply	DC 12V 1.5A
Verification Speed	≤ 1 sec
Operating Temp.	0°C - 45°C
Operating Humidity	20% - 80%
Dimension	192 × 140 × 41 mm (Length×Width×Thickness)
Gross Weight	1.05 kg

* Note: RS232 is for external printer.


Configuration

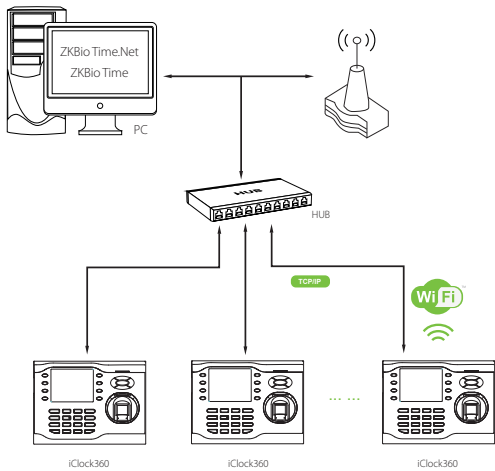


What's in the Box




iClock360




Back Plate



Power Adapter



Screws and Holders



RJ45 to RS485 2Pin cable



USB Cable

